

GCL 2-50 CG Professional

Four times better visibility combined with smart functions

WHY THIS



Maximum visibility

Due to green laser lines




Optimum precision thanks to Bluetooth® connection for control

Using a smart phone



Dual power source

Can be operated both with 10.8/12V Li-ion battery and with standard alkaline batteries

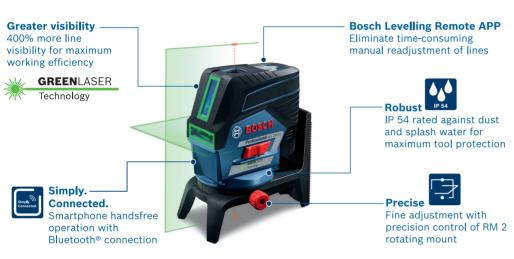





















| GCL 2-50 CG Professional | Unit | Specification |
|---|------|---|
| Line projection | | 1V+1H+2P |
| Part number | - | 0 601 066 H80 |
| Working range without receiver, line | m | 20 |
| Working range with *LR 7 receiver, line | m | 5 - 50 |
| Working range, plumb dots | m | 10 (up and down) |
| Accuracy, laser lines | mm/m | ±0.3 |
| Accuracy, plumb dots | mm/m | ±0.7 |
| Self-levelling range | 0 | ±4 |
| Laser lines colour | - | Green |
| Plumb dots colour | - | Red |
| Tripod thread size | inch | 1/4 |
| Dust and splash protection | - | IP 54 |
| Power supply | - | 4 x 1.5 V LR6 (AA) batteries or 10.8 V / 12 V Li-ion battery |
| Bluetooth® | _ | Yes |
| Scope of delivery | - | RM 2 + pouch + AA1 battery adapter + Alkaline batteries + target plate + case |

RM 3 Professional multifunctional mount (part number 0.601.092.800) *optional accessory:

LR 7 Line Laser Receiver (part number 0.601.069.J00)

TARGET USERS

- General construction (dry-walling)
- Floor & tile layers
- Carpenters
- Plumbers
- Glaziers
- Electricians













(A) BOSCH

BOSCH LEVELLING REMOTE APP







www.bosch-pt.asia